



# INSTALLATION INSTRUCTIONS

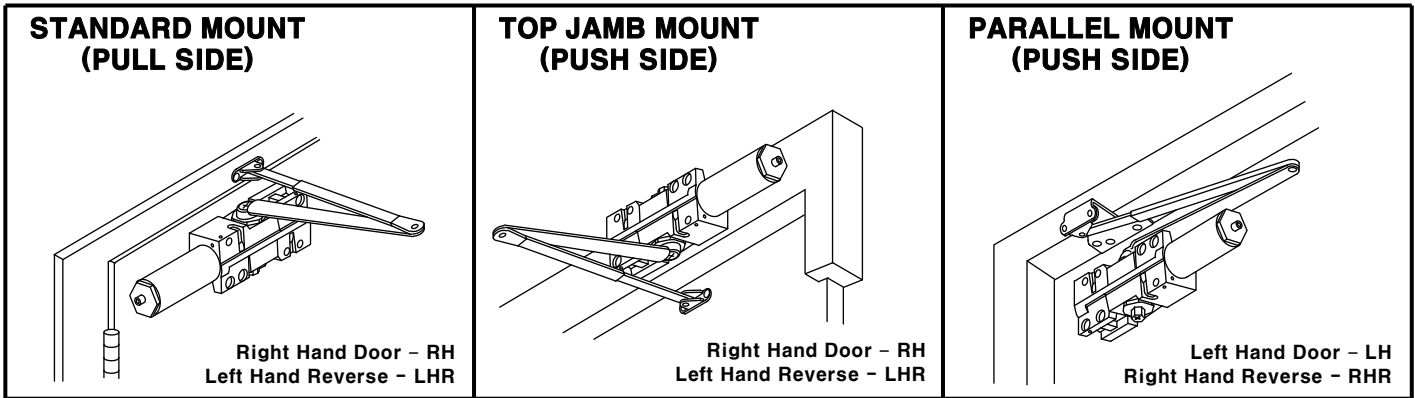



DOOR CLOSER SIZE	MAXIMUM DOOR WIDTH		FULL TURNS of POWR ADJUSTING SCREW	
	EXTERIOR (SWING OUT)	INTERIOR	NK-5051 NK-5051DA	NK-5051BF NK-5051BF.DA
BF	-	5 lb-f	-	14 C.C.W
1	28" (0.71m)	32" (0.81m)	7 C.C.W	12 C.C.W
2	32" (0.81m)	36" (0.91m)	4 C.C.W	8 C.C.W
3	36" (0.91m)	42" (1.07m)	0 (PRESET)	0 (PRESET)
4	42" (1.07m)	48" (1.22m)	5 C.C.W	4 C.C.W
5	48" (1.22m)	54" (1.37m)	10 C.C.W	-
6	54" (1.37m)	58" (1.47m)	15 C.C.W	-

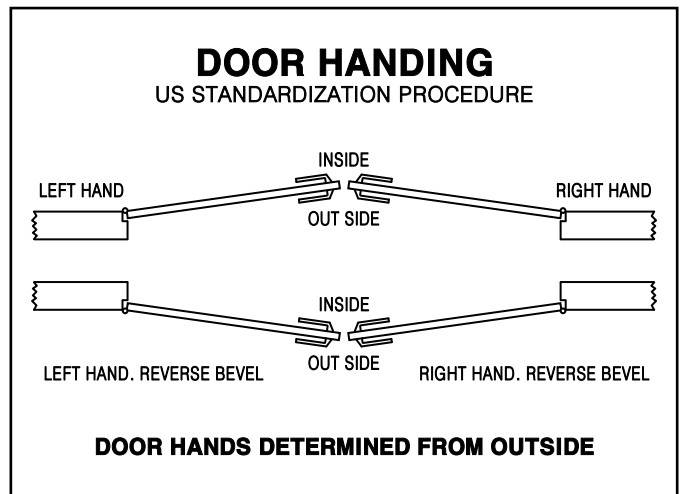

**C.W. = CLOCKWISE**  
**C.C.W = COUNTER CLOCKWISE**

**PLEASE NOTE**  
TURNS REQUIRED ARE APPROXIMATE BECAUSE OF VARIOUS DOOR CONDITIONS AND LOCATIONS. YOU MAY HAVE TO FURTHER ADJUST SPRING TENSION TO SUIT YOUR REQUIREMENTS

**IT IS IMPORTANT TO CAREFULLY FOLLOW ALL INSTALLATION AND MOUNTING INSTRUCTIONS WHEN INSTALLING ANY DOOR CLOSER.**

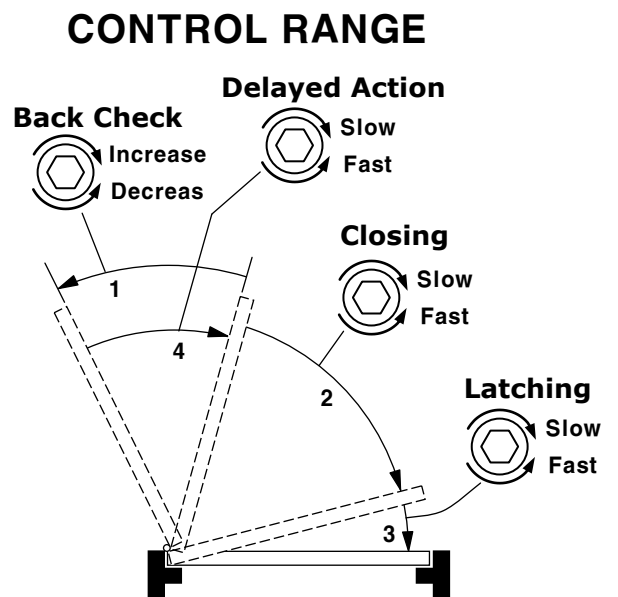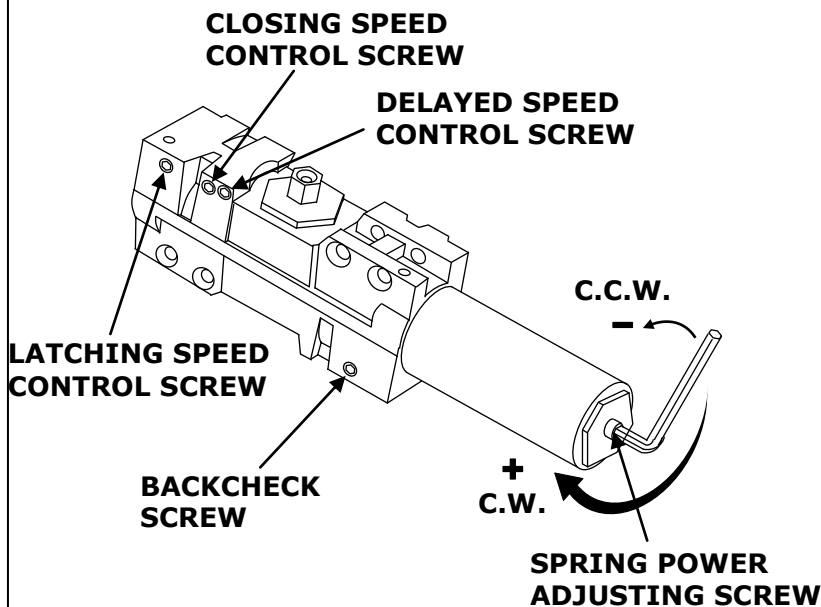


# STANDARD INSTALLATION CLOSER MOUNTED ON DOOR ON PULL SIDE



DOOR OPENING: 120°

This drawing shown LEFT HAND DOOR. For RIGHT HAND DOOR should be install in symmetry.

2 Holes for #14  
All-Purpose or 1/4-20  
(M6×1.0) Machine  
Screws.

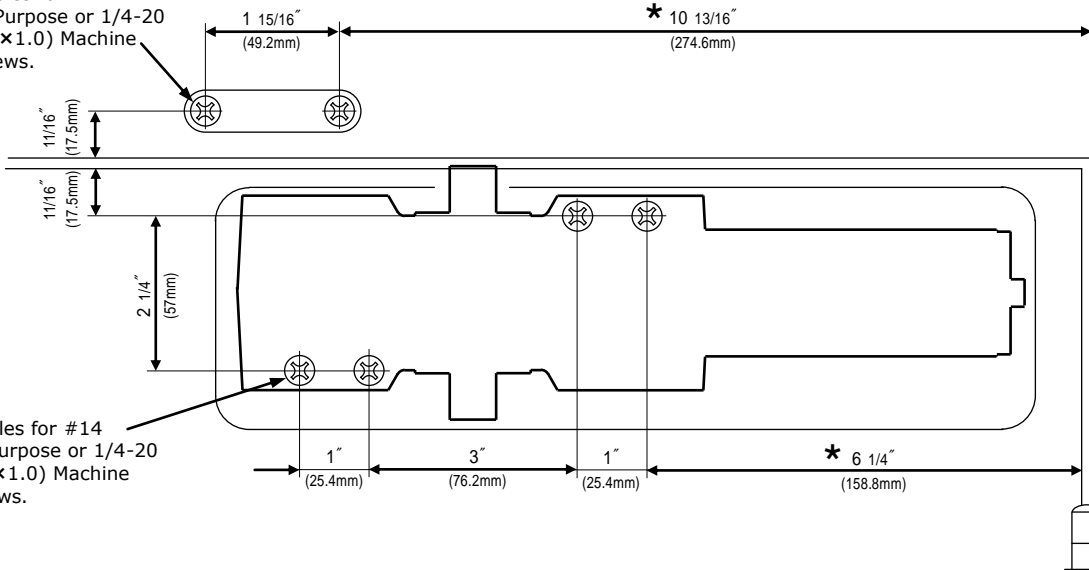

4 Holes for #14  
All-Purpose or 1/4-20  
(M6×1.0) Machine  
Screws.

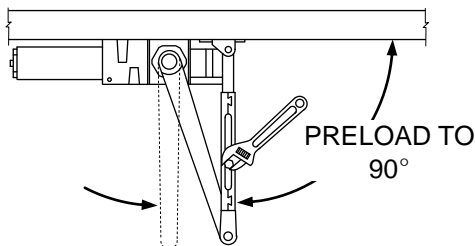

1. Adjust spring power to match door width as indicated by chart on page1.
2. Mount closer on door as dimensions shown. Tube end toward hinge. If pivots are used, locate closer and shoe from CENTERLINE OF PIVOT.  
(For offset pivots, pls increase the marked dimensions by 1/8")
3. Place main arm on top of shaft, 100° to closer body, insert arm screw into top of shaft and tighten.
4. Attach shoe to frame as shown. (If more latching power is required, shoe 180°)
5. Open door and insert rod in forearm.
6. With forearm at left angle to door (90°), insert forearm set screw and tighten.  
(IF HOLD OPEN ARM IS USED, THE NUT IS ON THE TOP FOR RH DOOR AND BOTTOM FOR LH DOOR)

### REGULATION:

A 'Normal' closing time from 90° open position to door stop position is 4-6 secs, evenly divided between main swing speed and latch swing speed. Use socket key (furnished) to adjust speed. To slow main speed of door, turn regulating screw nearest shaft clockwise. To slow latch speed, turn regulating screw nearest latch clockwise.

### BACK CHECK



To increase back-check force, turn regulating screw nearest hinge clockwise. DO NOT USE ABRUPT BACKCHECK OR EXPECT DOOR CLOSER TO ACT AS A DOOR STOP.

### COVER

Place insert in proper cutout, then push cover against door. Tighten both cover screw securely.

### HOLD OPEN ADJUSTMENT ( when hold open arm is used )

Loose adjusting nut, open door to desired hold open position and tighten nut. Do not permit door to swing beyond hold open setting.


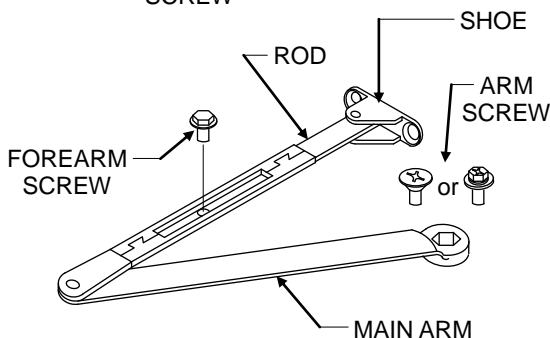
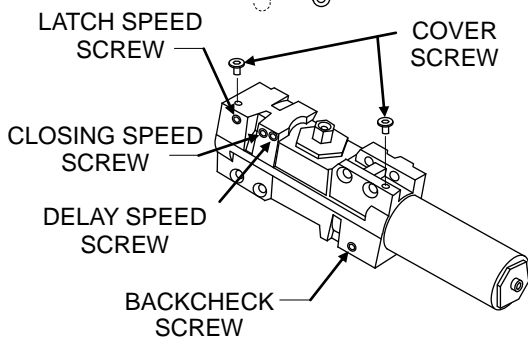


# TOP JAMB INSTALLATION

## CLOSER MOUNTED TOP JAMB ON PUSH SIDE OF DOOR

DOOR OPENING: 120°

This drawing shown is RIGHT HAND DOOR. For LEFT HAND DOOR should be install in symmetry.

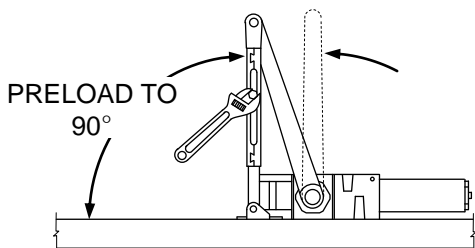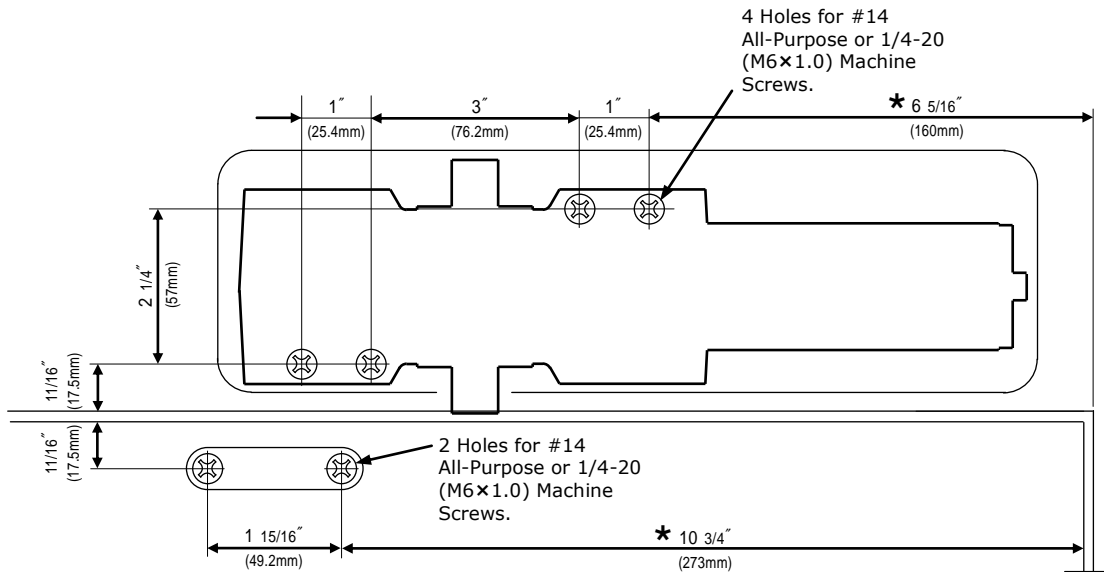

1. Adjust spring power to match door width as indicated by chart on page1.
2. Mount closer on frame as dimensions shown. Tube end toward hinge. If pivots are used, locate closer and shoe from CENTERLINE OF PIVOT. (For offset pivots, pls increase the marked dimensions by 1/8")
3. Place main arm on top of shaft, 100° to closer body, insert arm screw into top of shaft and tighten.
4. Attach shoe to frame as shown. (If more latching power is required, shoe 180°)
5. Open door and insert rod in forearm.
6. With forearm at left angle to door (90°), insert forearm set screw and tighten. (IF HOLD OPEN ARM IS USED, THE NUT IS ON THE TOP FOR RH DOOR AND BOTTOM FOR LH DOOR)

### REGULATION:

A 'Normal' closing time from 90° open position to door stop position is 4-6 secs, evenly divided between main swing speed and latch swing speed. Use socket key (furnished) to adjust speed. To slow main speed of door, turn regulating screw nearest shaft clockwise. To slow latch speed, turn regulating screw nearest latch clockwise.

### BACK CHECK

To increase back-check force, turn regulating screw nearest hinge clockwise. DO NOT USE ABRUPT BACKCHECK OR EXPECT DOOR CLOSER TO ACT AS A DOOR STOP.

### COVER

Place insert in proper cutout, then push cover against door. Tighten both cover screw securely.

### HOLD OPEN ADJUSTMENT ( when hold open arm is used )

Loose adjusting nut, open door to desired hold open position and tighten nut. Do not permit door to swing beyond hold open setting.

